


# CABLES WITH ZINC PLUGS



MADE IN THE USA & DESIGNED WITH FEATURES  
TO KEEP YOU ON THE ROAD LONGER

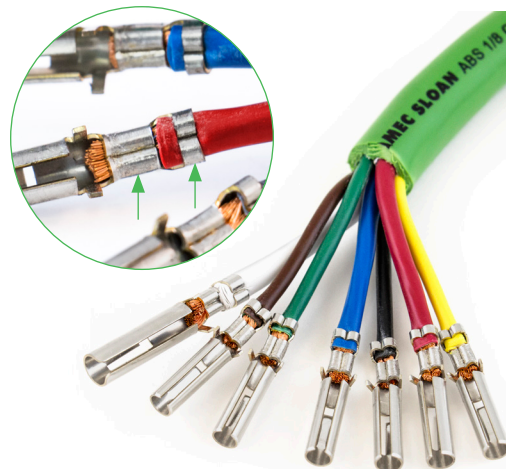

## FEATURES & BENEFITS

- Made in the USA!
- Copper content is 10% greater than what SAE J1128 requires which results in better flexibility and connectivity
- All ABS, ISO, and Standard Cables with Zinc Plugs utilize our **premium spring guards** which are tightly wound and have a yellow zinc dichromate finish for extra corrosion protection. Plus, an integrated loop for easy hang up.

Brass plated terminals are double crimped to the wires for strain relief & vibration-proof connections.

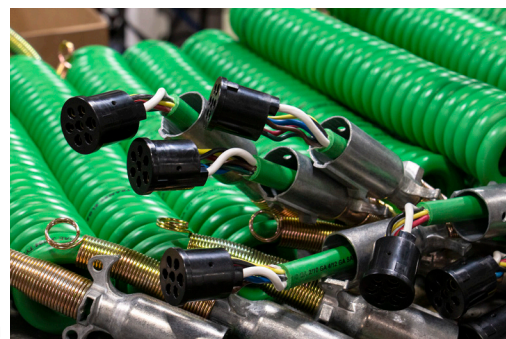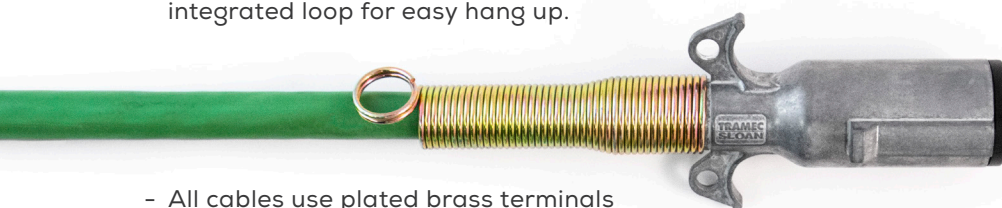

Our cables are made in the USA!

- All cables use plated brass terminals for excellent corrosion resistance
- Terminals are **double crimped** to the wire to provide strain relief & vibration-proof connections
- Wire meets SAE J2394 specs
- Our **heavy duty XT jacket** is available for ABS cables and provides superior cut, tear, and abrasion resistance. Plus, excellent coil retention in both cold & warm weather extremes
- The **standard jacket** provides good cut, tear, and abrasion resistance. Plus, good coil retention in both cold & warm weather extremes
- Temperature rated -60°F to 190°F



Heavy Duty XT Jacket provides superior protection against damage and excellent coil retention.

# CABLES WITH ZINC PLUGS

## COILED ABS CABLES WITH ZINC PLUGS

P/N	JACKET	LENGTH	LEADS
4AA12	Heavy Duty XT	12'	Two 12"
4AA15	Heavy Duty XT	15'	Two 12"
4AA16	Heavy Duty XT	15'	One 12" & One 72"
4AA17	Heavy Duty XT	15'	One 12" & One 48"
4DA12	Standard ABS Green	12'	Two 12"
4DA15	Standard ABS Green	15'	Two 12"
4DA16	Standard ABS Green	15'	One 12" & One 72"
4DA17	Standard ABS Green	15'	One 12" & One 48"



**4AA15:** Coiled ABS Cable with XT Jacket, 15' with Two 12" Leads

## STRAIGHT ABS CABLES WITH ZINC PLUGS

P/N	JACKET	LENGTH
4BA12	Heavy Duty XT	12'
4BA15	Heavy Duty XT	15'
4BA20	Heavy Duty XT	20'
4CA12	Standard ABS Green	15'
4CA15	Standard ABS Green	12'
4CA20	Standard ABS Green	20'



**4CA12:** Straight ABS Cable with Standard Jacket, 12'

## COILED STANDARD CABLES WITH ZINC PLUGS

P/N	CABLE/JACKET	LENGTH	LEADS
45A12	1/10 - 6/12 GA, Black	12'	Two 12"
45A15	1/10 - 6/12 GA, Black	15'	Two 12"
45A16	1/10 - 6/12 GA, Black	15'	One 12" & One 72"
45A17	1/10 - 6/12 GA, Black	15'	One 12" & One 48"
47A12	1/12 - 6/14 GA, Black	12'	Two 12"
47A15	1/12 - 6/14 GA, Black	15'	Two 12"
47A16	1/12 - 6/14 GA, Black	15'	One 12" & One 72"
47A17	1/12 - 6/14 GA, Black	15'	One 12" & One 48"



**47A15:** Coiled Standard Cable, 1/12-6-14 Gauge, Black Jacket, 15' with Two 12" Leads

## STRAIGHT STANDARD CABLES WITH ZINC PLUGS

P/N	CABLE/JACKET	LENGTH
46A12	1/10 - 6/12 GA, Black	12'
46A15	1/10 - 6/12 GA, Black	15'
46A20	1/10 - 6/12 GA, Black	20'
48A12	1/12 - 6/14 GA, Black	15'
48A15	1/12 - 6/14 GA, Black	12'
48A20	1/12 - 6/14 GA, Black	20'



**46A15:** Straight Standard Cable, 1/10-6-12 Gauge, Black Jacket, 15'